


TODDY® PRO SERIES VALVE

For video tutorials and more information, please visit ToddyCafe.com/Brewing

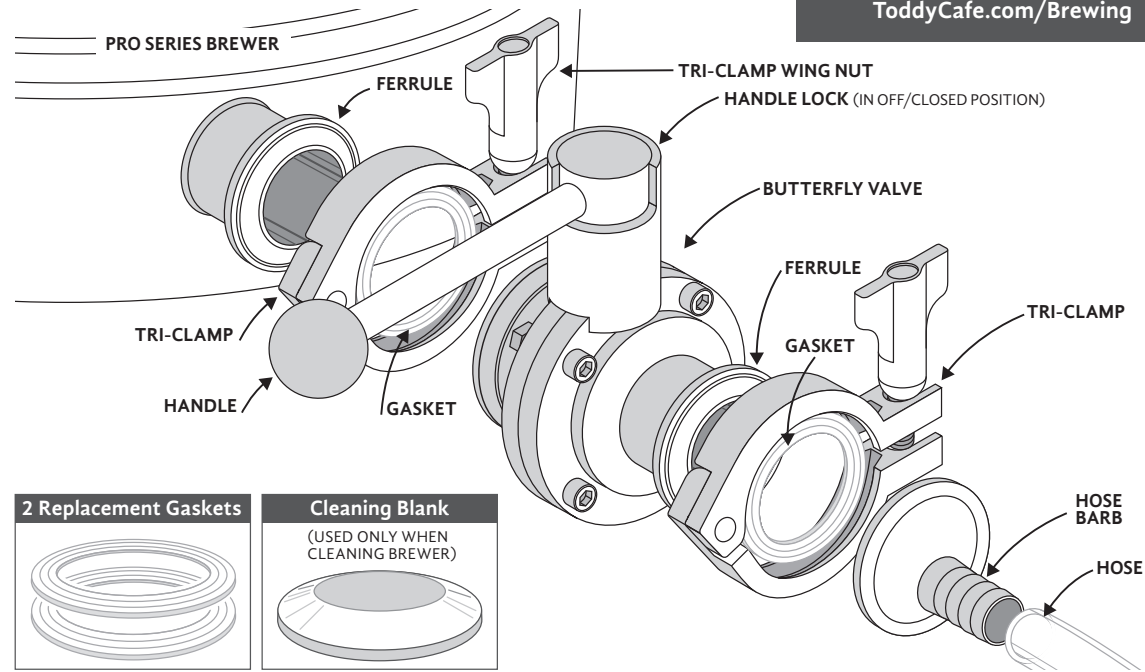

Assembly Instructions

- 1 Twist the wing nuts on the 2 **tri-clamps** **counterclockwise** to loosen and remove from the assembly.
- 2 Remove 2 plastic shipping squares (not pictured) from assembly and discard.
- 3 Clean all parts **before first use. We recommend using Toddy® Cleaner.** (See cleaning instructions on Brewing Guide.)
- 4 Place a **gasket** **against the brewer ferrule**, ensuring the flange of the gasket is seated inside the indentation ring of the ferrule.
- 5 Place the **butterfly valve** against the other side of the **gasket** so that the **handle is upward and points away from the system when the valve is open**. Pull out on the handle to unlock, and move it to the off/closed position.
- 6 Attach a **tri-clamp** around the fitting so that the **wing nut faces upward and is on the right side of the fitting** while facing the unit. Hand tighten securely.
- 7 Place a **second gasket** on the **exposed side of the butterfly valve**, ensuring the flange of the gasket is seated inside the indentation ring.
- 8 Place the **hose barb** against the other side of the gasket. Position the barb toward the bottom of the valve (see image).
- 9 Attach a **tri-clamp** around the fitting so the **wing nut faces upward and is on the right side of the fitting** while facing the unit. Hand tighten securely.